

- Original concept from: Canadian Woodworking & Home Improvements

### Material Required

2 - 2x4x8' SPF (38x89x2440)

4 - 2x2x8' SPF (38x38x2440)

6 - 1x6x8' SPF (19x140x2440)

4 - 1x4x8' SPF (19x89x2440)

1 - 2'x8'x3/4" Spruce plywood

( 1/2 sheet)

2 - 3" Casters (Canadian Tire Grey Rubber #046-0717-8)

1 Handle (Canadian Tire #046-1661-2)

1 1/2", 2 1/2" & 3" Wood Screws

2 - 6" Wood Screws

4 - 1/4" x 4" Carriage bolts with nuts and washers




# 2025 Regional Practice Lemonade Stand

Drawn: dr

Date: Dec/1/2019

Scale: n.t.s.

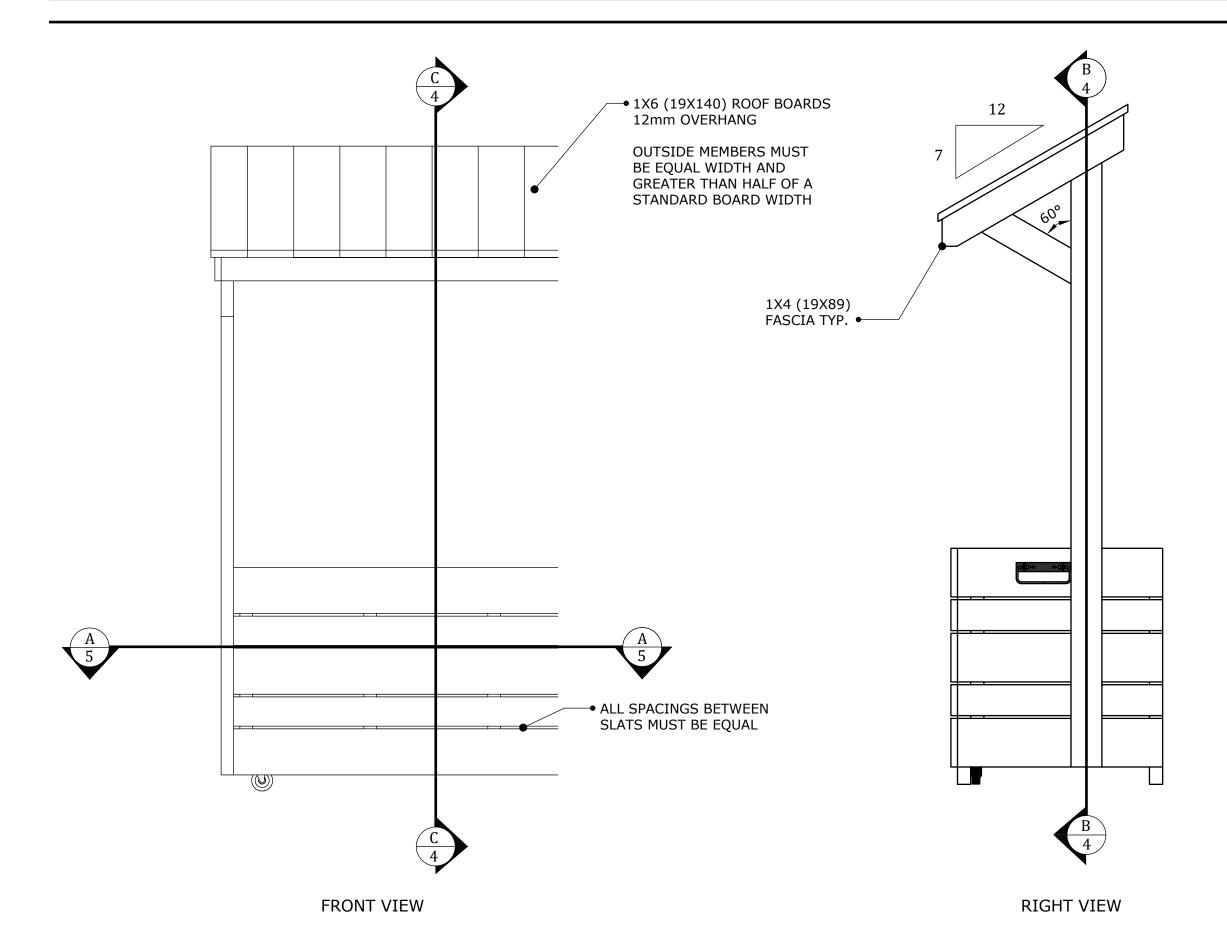

- All dimensions in millimetres
- indicates marking criteria
- Slats 1x6 (19x140)
- Keep wood screws aligned and equally spaced
- All screws countersunk and flush with wood surface
- Ease all edges
- All roof boards overhang fascia 12mm on all sides





2025 Regional Practice Lemonade Stand Elevations

Drawn: dr

Date: Dec/1/2019

Scale: n.t.s.

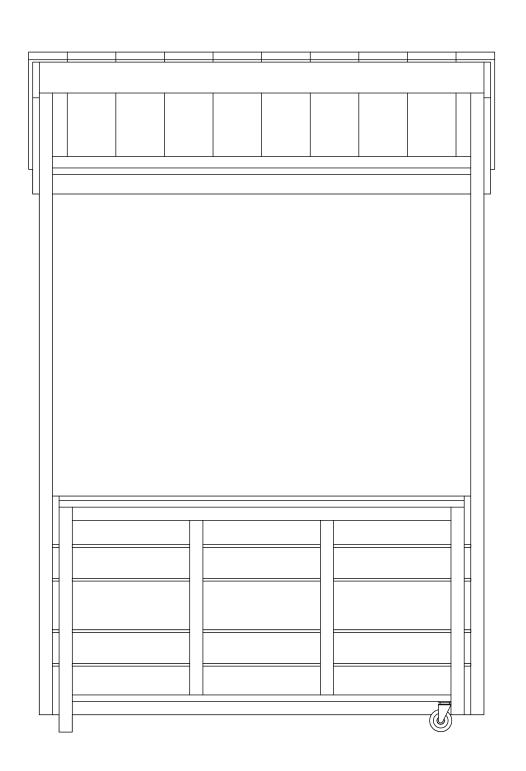

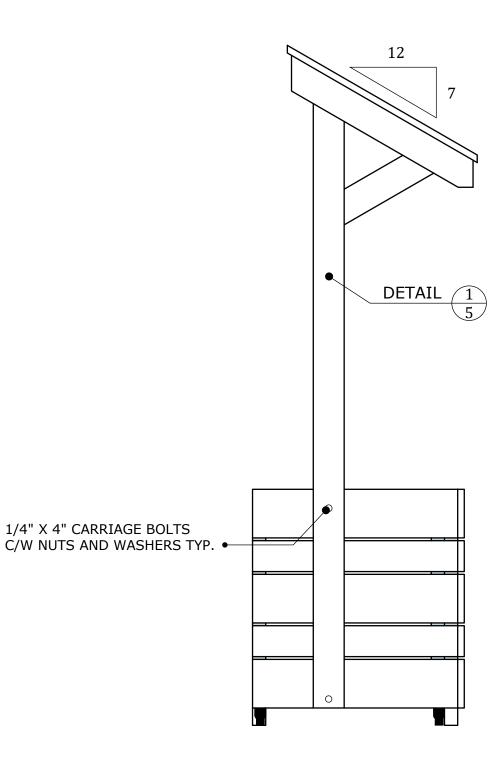

BACK VIEW LEFT VIEW

#### Notes:

- All dimensions in millimetres
- ?indicates marking criteria
- Slats 1x6 (19x140)
- Keep wood screws aligned and equally spaced
- All screws countersunk and flush with wood surface
- Ease all edges
- All roof boards overhang fascia 12mm on all sides




# 2025 Regional Practice Lemonade Stand Elevations

Drawn: dr

Date: Dec/1/2019

Scale: n.t.s.

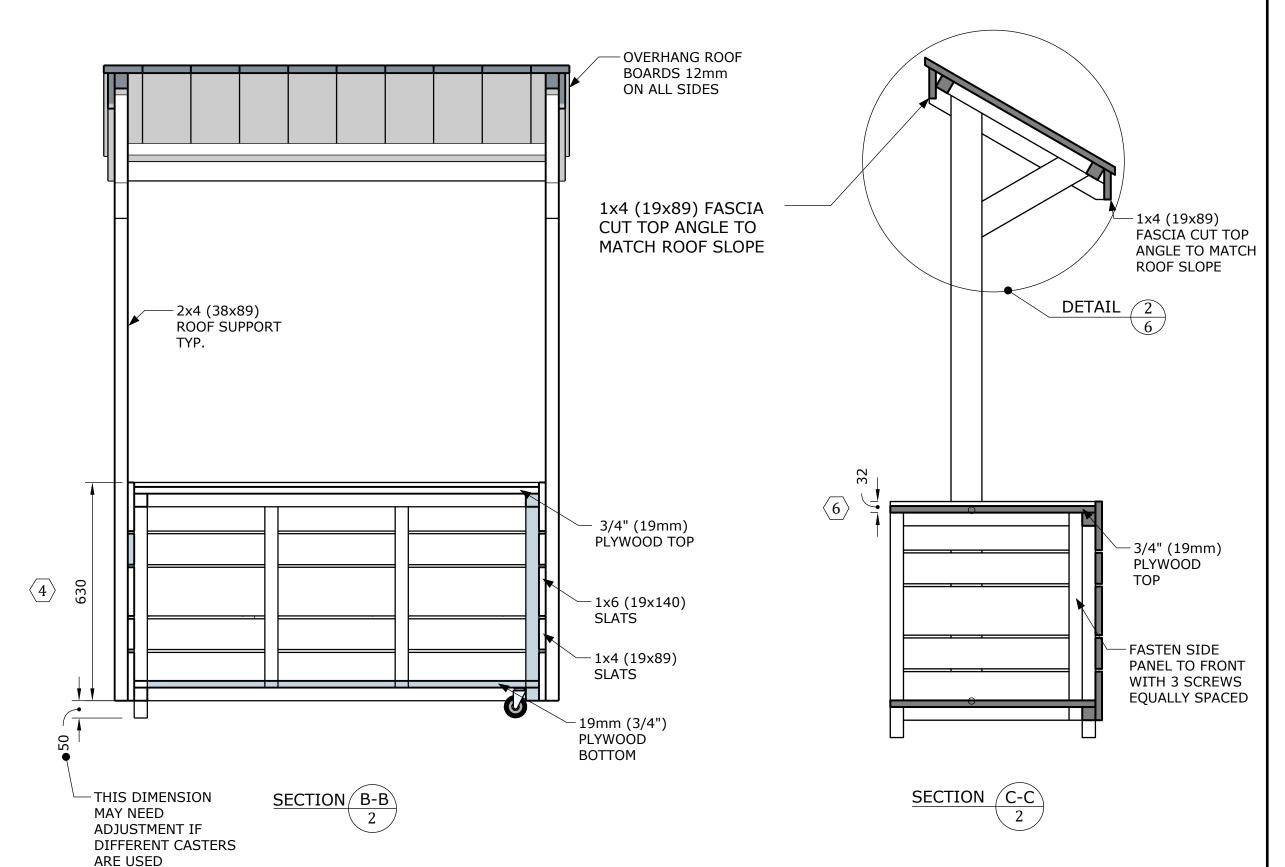

- All dimensions in millimetres
- indicates marking criteria
- Slats 1x6 (19x140)
- Keep wood screws aligned and equally spaced
- All screws countersunk and flush with wood surface
- Ease all edges
- All roof boards overhang fascia 12mm on all sides




### 2025 Regional Practice Lemonade Stand Cross Sections

Drawn: dr

Date: Dec/1/2019

Scale: n.t.s.

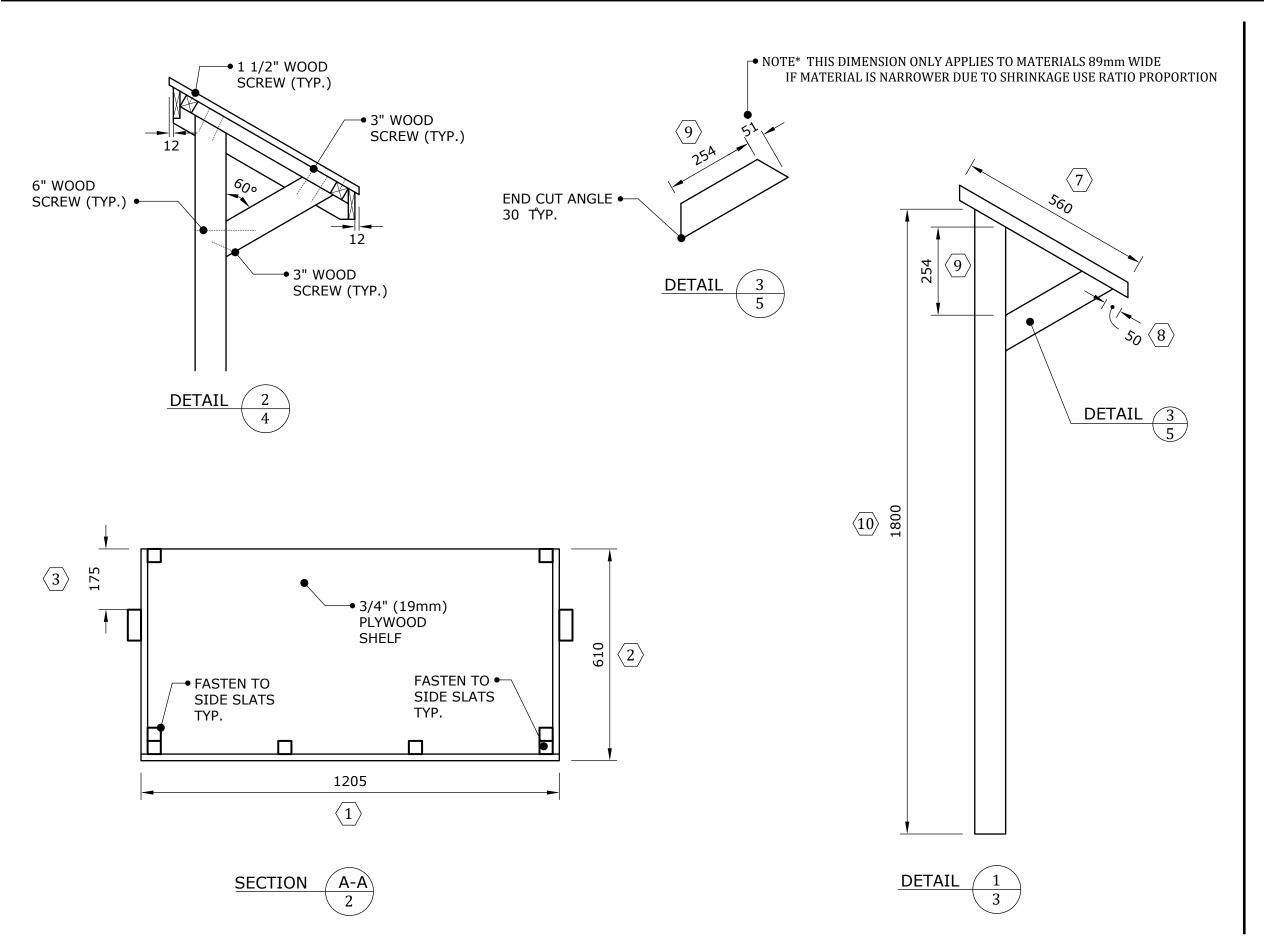

- All dimensions in millimetres
- ? indicates marking criteria
- Slats 1x6 (19x140)
- Keep wood screws aligned and equally spaced
- All screws countersunk and flush with wood surface
- Ease all edges



## 2025 Regional Practice Lemonade Stand Sections & Details

Drawn: dr

Date: Dec/1/2019

Scale: n.t.s.